



**SELECTABLE GALLONAGE FIRE NOZZLE 235L**

**QLD6.0/4.0 III**


QUANZHOU FOREDE FIREFIGHTING EQUIPMENT CO.,LTD.

## NOZZLE DESCRIPTION



- Pattern identification
- Hard anodized aluminum , Laser engraved
- Simple to operate (1/4 turn from straight stream to fog)
- Raised lug marks straight stream for limited visibility operations
- Easy to service & repair
- Compatible with quick attach foam tube

## OUTLINE DIMENSIONS

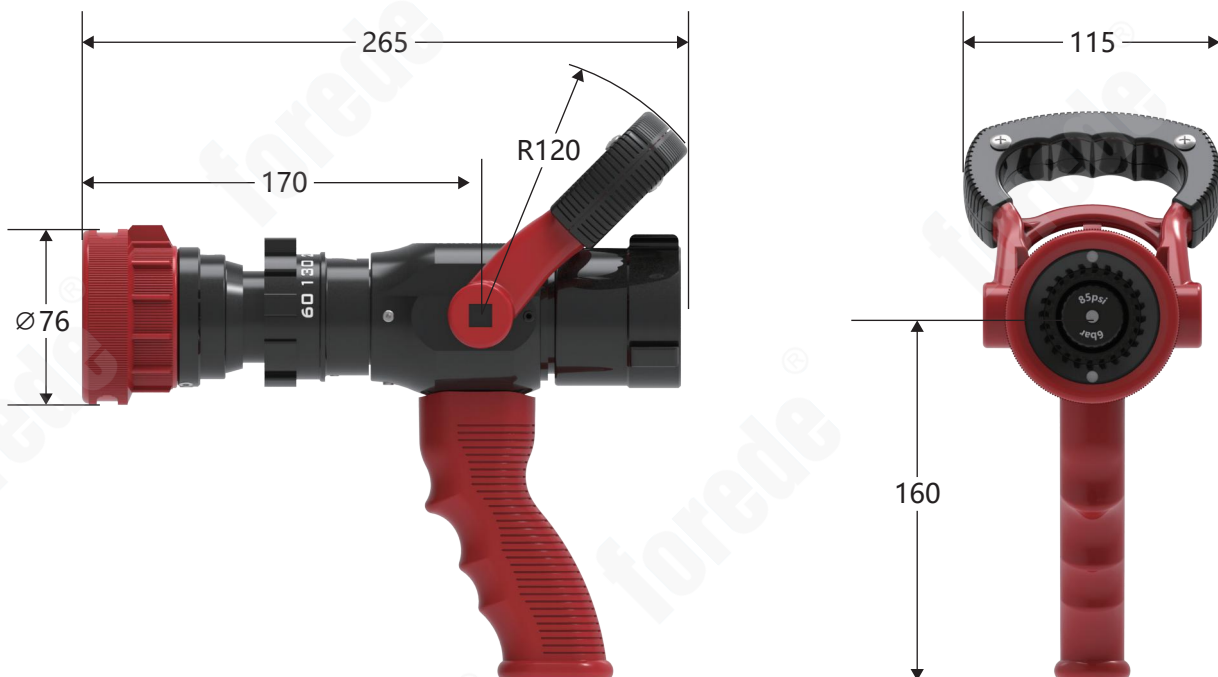

QLD 6.0/4.0 III Fire Nozzle Outline Dimensions (MM)


### QLD 6.0/4.0 III

Selectable Gallonage Fire Nozzle

## TECHNICAL SPECIFICATION

<b>Weight</b>	1.75 kg	<b>Throw Range</b>	37m @ 6bar
<b>Material</b>	Body: Aluminum Valve: Aluminum Handle: ABS Bumper: Rubber	<b>Flow Range</b>	60 L/M@6bar 130 L/M@6bar 235 L/M@6bar Flush
<b>Work Pressure</b>	85PSI (6 bar)	<b>Inlet Size</b>	1.5" (38mm)
<b>Max. Pressure</b>	350PSI (24 bar)	<b>Coupling</b>	Storz / NH / BSP /G O S T etc.
<b>Max. Fog Angle</b>	120°		


## OPERATING INSTRUCTIONS

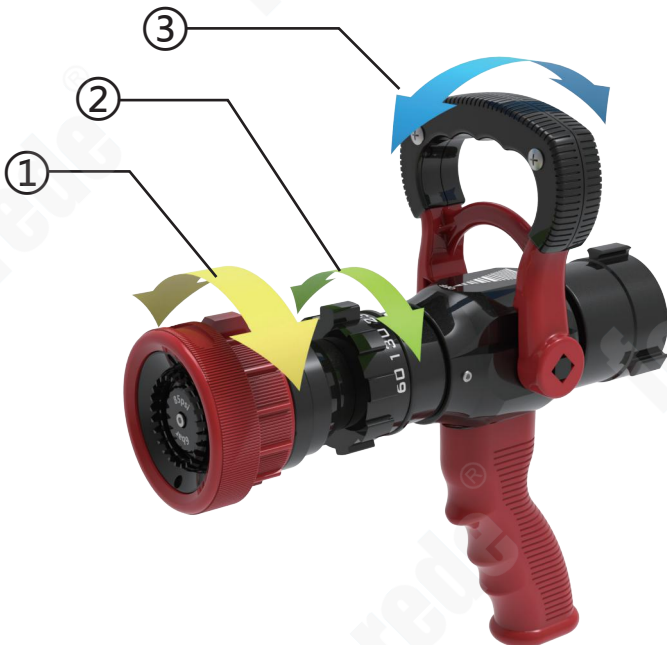

- ①—SS-FOG Pattern: Twist the rubber bumper
- ②—Flow Rate Adjust: Twist the flow adjust ring to obtain required flow rate
- ③—Valve Handle: Push the handle forward-valve close; Pull the handle backward-valve open



## PERFORMANCE CHART

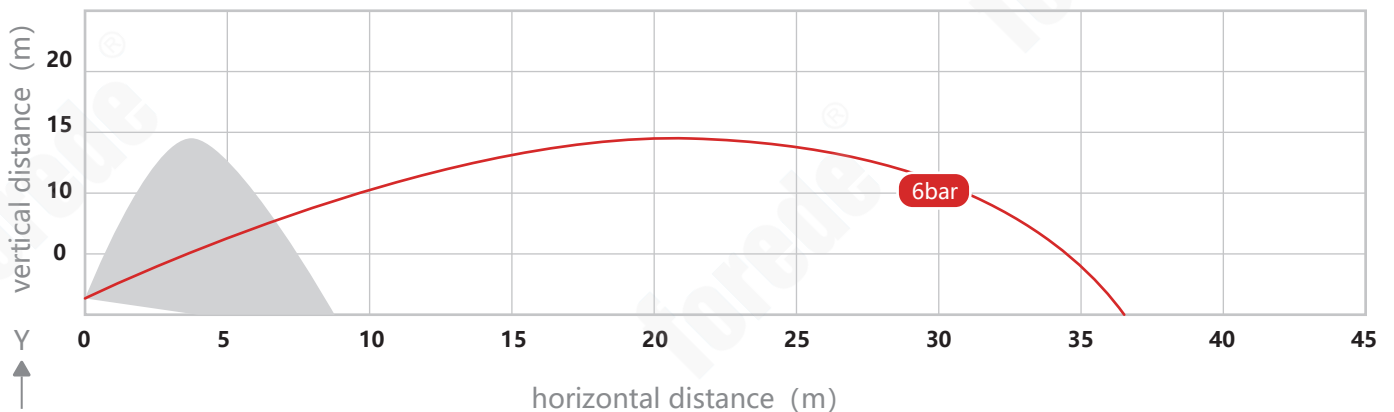

Max. Throw Range 37m (6bar)

Max. Fog Angle 120°